

Vertical Balers

X-series



Baler X25 HD Galvanized FD

Withstands severe environments

Perfect for customers whose environments place severe demands on the machinery. When our standard paint will not suffice and there are no special hygienic requirements for stainless steel, the galvanized surface will lengthen overall lifetime.


Highlights

- Galvanized according to ASTM A123/A123M standards
- Surface is resistant to harsh demands
- Free of flaking paint
- Suitable for both indoors and outdoors
- Easy to install
- Low overall height

Optional Extras



A draining system leads liquids out of your baler during compaction of wet waste.

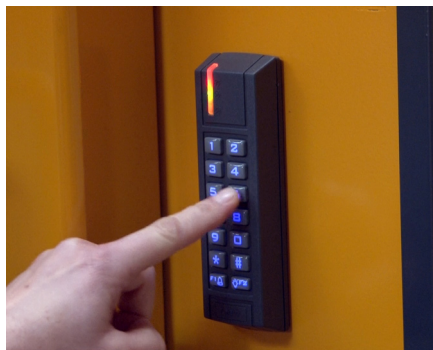

A digital auto lock enables baler loading but restricts access to run a press cycle.



With our monitoring system BRA-IN you can control and optimize your baler fleet.

Product details

Baler X25 HD Galvanized FD



Whisper

30 dB



Refrigerator

50 dB




**X25 HD Galvanized
FD**

**59-60
dB**



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

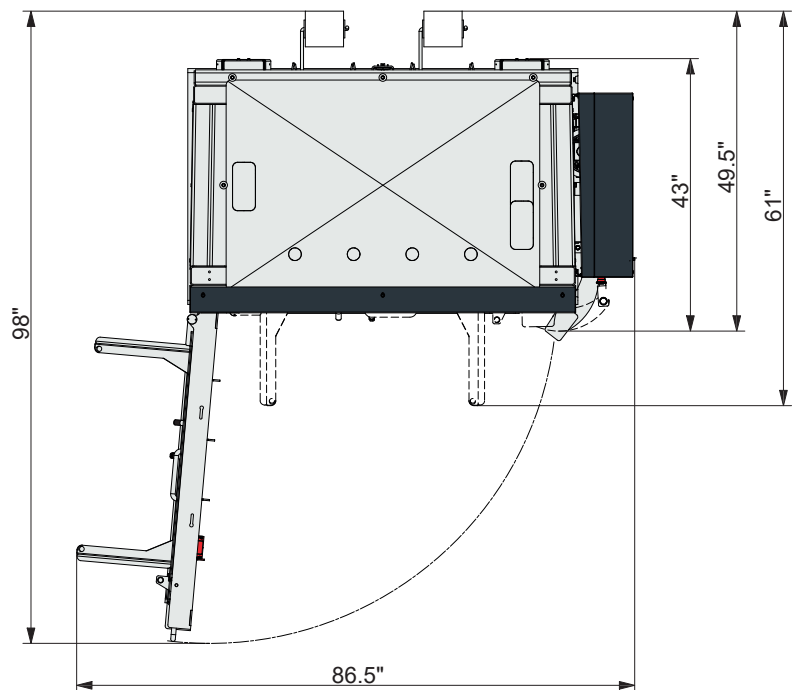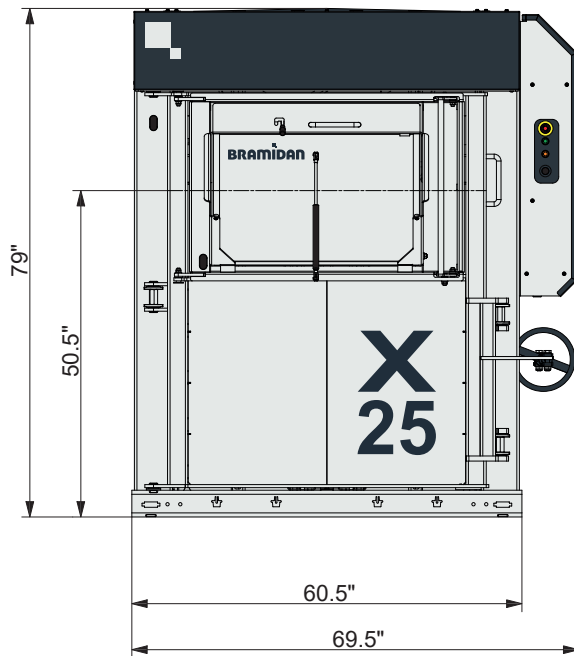

Technical specifications

Bale size WxDxH (inch)	48 x 30 x 30
Feed opening WxH (inch)	33 x 18
Power supply	3x400V 50Hz 16A
Motor (HP)	5.5
Cycle time avg. (sec)	23
Dimensions WxDxH (inch)	70 x 61 x 79
Weight (lbs)	3,250
Stroke (inch)	37
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (lbs)	500-650
Plastic foil (lbs)	550-775



Press force

55,200 lbs



Noise level

59-60 dB



Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.