

Vertical Balers

X-series

Baler X30 HD Galvanized FD



Perfect for harsh environments

When the machine is exposed to water and other liquids, the ASTM A123/A123M galvanized steel coating provides protection and increases lifetime.


Highlights

- Hot-dip galvanized steel
- Meets ASTM A123/A123M standards
- Ideal for PET bottles and aluminum cans
- Meets your specific needs
- One step bale and drain

Optional Extras



A draining system leads liquids out of your baler during compaction of wet waste.

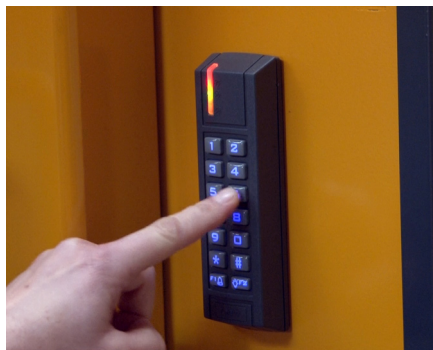

Prevent unauthorized people from operating your baler with a digital auto lock.



Gain remote control of your baler with our intelligent fleet monitoring system, BRA-IN.

Product details

Baler X30 HD Galvanized FD



Whisper

30 dB



Refrigerator

50 dB



**X30 HD Galvanized
FD**

59-60
dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

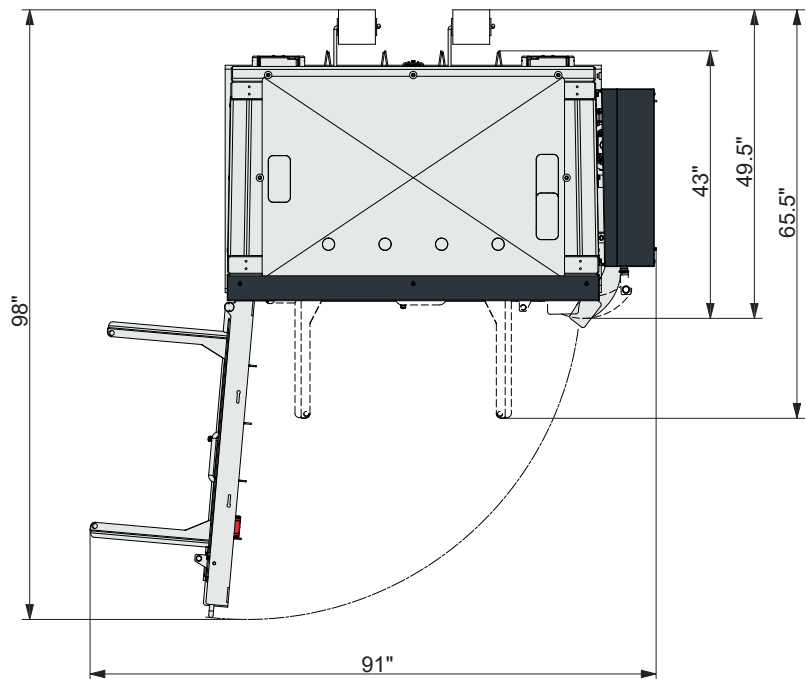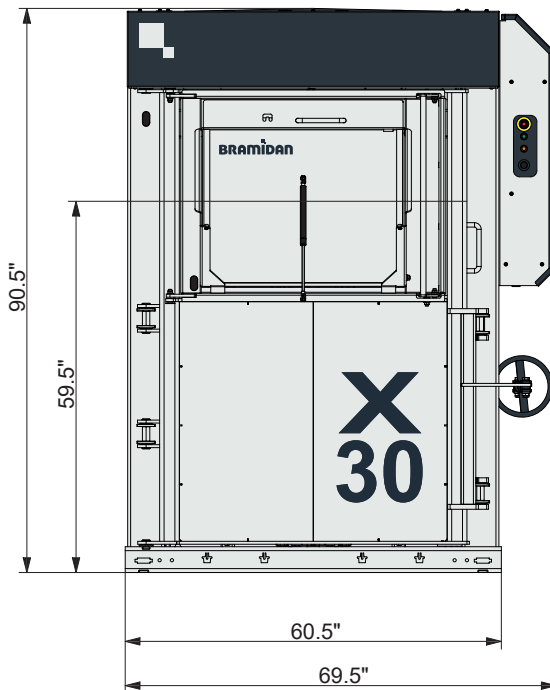

Technical specifications

Bale size WxDxH (inch)	48 x 30 x 48
Feed opening WxH (inch)	33 x 22
Power supply	3x400V 50Hz 16A
Motor (HP)	5.5
Cycle time avg. (sec)	25
Dimensions WxDxH (inch)	70 x 66 x 91
Weight (lbs)	3,900
Stroke (inch)	37
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (lbs)	600-775
Plastic foil (lbs)	775-1,000



Press force	66,200 lbs
-------------	------------



Noise level	59-60 dB
-------------	----------



Waste types

Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.