

Vertical Balers

X-series



Baler X30 HD Galvanized

Perfect for harsh environments

When the machine is exposed to water and other liquids, the ASTM A123/A123M galvanized steel coating provides protection and increases lifetime.

Highlights

- Hot-dip galvanized steel
- Meets ASTM A123/A123M standards
- Ideal for PET bottles and aluminum cans
- Meets your specific needs
- One step bale and drain

Optional Extras



Restrict the access to your baler with a digital auto lock. Use a key tag or personal code.



Get online access to your balers with our monitoring system called BRA-IN.



A flap door prevents back-run when filling PET bottles and cans into the chamber.

Product details

Baler X30 HD Galvanized



Whisper

30 dB



Refrigerator

50 dB




X30 HD Galvanized

59-60 dB



Other balers

75 dB




Cars on highway

100 dB



Turbojet engine

160 dB

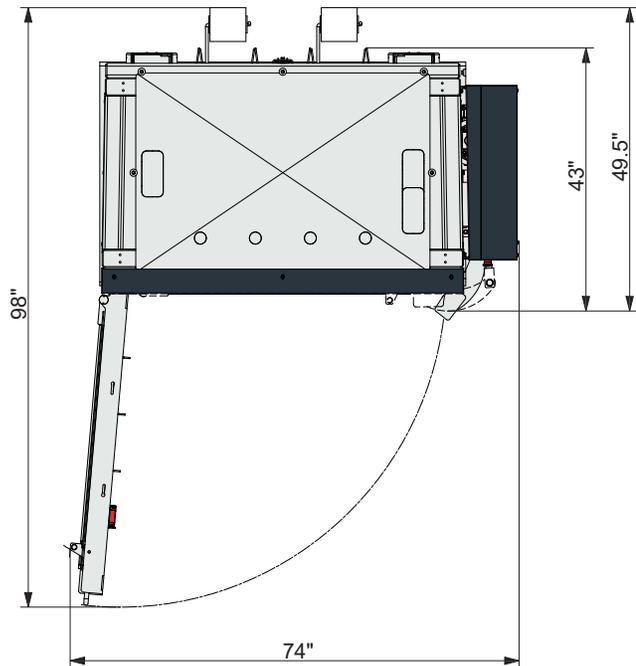

Technical specifications

Bale size WxDxH (inch)	48 x 30 x 48
Feed opening WxH (inch)	43 x 26
Power supply	208/230/480V 3-phase 60Hz
Motor (HP)	5.5
Cycle time avg. (sec)	25
Dimensions WxDxH (inch)	69 x 50 x 91
Weight (lbs)	3,800
Stroke (inch)	37
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight
Cardboard (lbs) 600-775
Plastic foil (lbs) 775-1,000



Press force 66,200 lbs



Noise level 59-60 dB



Waste types
Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.