

Vertical Balers

X-series



Baler X50 Galvanized

For wet environments

For applications with no hygienic requirements for stainless, but where demands on surface treatment are so severe that a normal painted baler would have a short lifetime.

Highlights

- DS/EN 1461:2009 galvanized
- For all types of recyclables
- Suited for PET bottles, aluminium and food cans, and plastic jugs
- Combination of baling and draining of residual liquids available

Optional Extras



A digital auto lock enables baler loading but restricts access to run a press cycle.



Get online access to your balers with our monitoring system called BRA-IN.



A flap door helps you handle bottles and cans easily without backrun.

Product details

Baler X50 Galvanized



Whisper

30 dB



Refrigerator

50 dB




X50 Galvanized

62-64 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

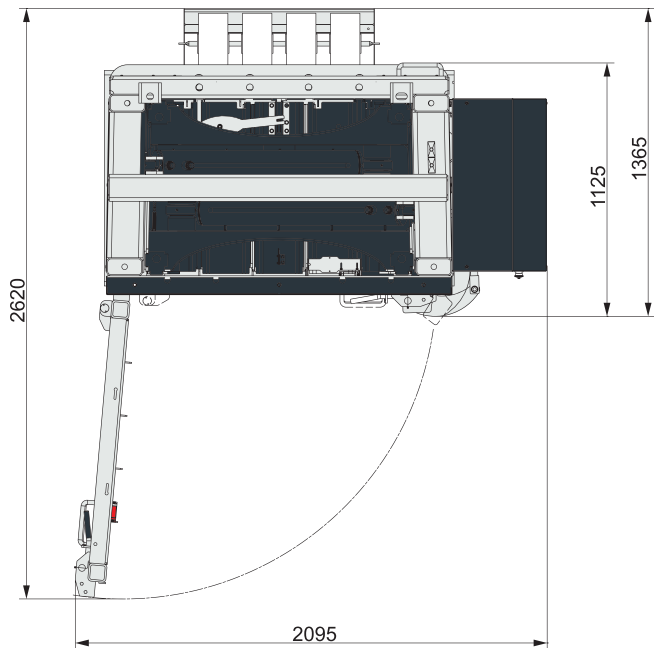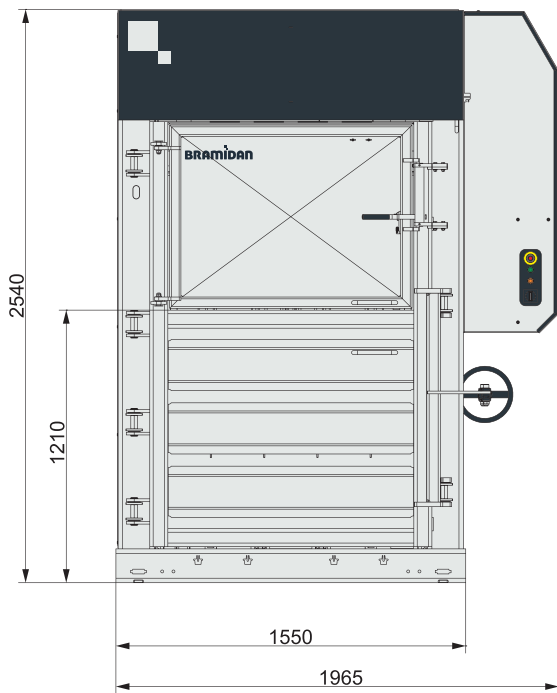

Technical specifications

| | |
|----------------------------------|--------------------|
| Bale size WxDxH (mm) | 1200 x 800 x 1100 |
| Feed opening WxH (mm) | 1090 x 610 |
| Power supply | 3x400V 50Hz 16A |
| Motor (kW) | 5.5 |
| Screen 40 mm (m ³ /h) | 22 |
| Dimensions WxDxH (mm) | 1965 x 1365 x 2540 |
| Weight (kg) | 2435 |
| Stroke (mm) | 1210 |
| Number of ties | 4 |
| Type of tying | Twine / Steel wire |
| Full bale light | Yes |
| Bale eject | Automatic |



Bale weight
Cardboard (kg) 350-450
Plastic foil (kg) 400-500



Press force 50 t



Noise level 62-64 dB



Waste types
Cardboard, plastic foil, paper, PET bottles, alu cans, tin cans, hard plastic, liquid, EPS.

BRAMIDAN
bramidan.ie

Bramidan Ireland
Unit 5 Feltrim Business Park
Drynam Road
Swords, Co Dublin K67 VK51
Tel. 1 890 0660
sales@acmesystems.ie / sales@bramidan.ie