



HENRIK

Art.No.	Type
<b>220-300-205</b>	HENRIK bollard fitting excl TOWER pole. E27. Clear PC-screen. CL.I. Hot galvanized steel.
<b>220-300-C05</b>	HENRIK bollard fitting excl TOWER pole. E27. Clear PC-screen. CL.I. Cor-ten.
<b>220-300-x05*</b>	HENRIK bollard fitting excl TOWER pole. E27. Clear PC-screen. CL.I. Powder coated.* Additional charge for protection class II double insulated. Prepared for fuse inset.

**Accessories:**

<b>890-701-200</b>	TOWER pole 0,70M w/mounting hatch. 145/200mm. CL.II. Hot galvanized steel.
<b>890-701-C00</b>	TOWER pole 0,70M w/mounting hatch. 145/200mm. CL.II. Cor-ten.
<b>890-701-x00*</b>	TOWER pole 0,70M w/mounting hatch. 145/200mm. CL.II. Powder coated.*
<b>890-981-200</b>	TOWER pole 0,98M w/mounting hatch. 145/200mm. CL. II. Hot galvanized steel.
<b>890-981-C00</b>	TOWER pole 0,98M w/mounting hatch. 145/200mm. CL. II. Cor-ten.
<b>890-981-x00*</b>	TOWER pole 0,98M w/mounting hatch. 145/200mm. CL.II. Powder coated.*
<b>920-650-200</b>	TOWER foundation f/burial. 190x190x500mm. Hot galvanized.
<b>920-634-200</b>	Turn securing for Ø108/Ø133mm pole. Hot galvanized plate.
<b>924-100-012</b>	Fuse inset for Ø108/Ø133mm poles. 1 neozed fuse.
<b>920-67-220-18</b>	Cover screen 180°. Hot galvanized plate. (Also available in 120°)

**Recommended Light Sources:**

<b>982-70-09-03</b>	Philips CorePRO LEDbulb ND 7,5-60W. E27. A60. 15000h. 806Lm. 3000K.
<b>982-70-09-04</b>	Philips CorePRO LEDbulb ND 7,5-60W. E27. A60. 15000h. 806Lm. 4000K.


\* Powder coated: Standard colors are Anthracite RAL7016, Black RAL9005. Other RAL colors on request with extra price. Find the final Art.No. by replacing "x" with the color code. Anthracite: x=5, Black: x=9, Special: x=P.

**Variation options:**

- Also available with opal white PC-screen.

**Key features:**

- 10 year anti-corrosion warranty. (Hot galvanized)
- 10 year reorder warranty.
- Easy light source change and great flexibility with retrofit LED.

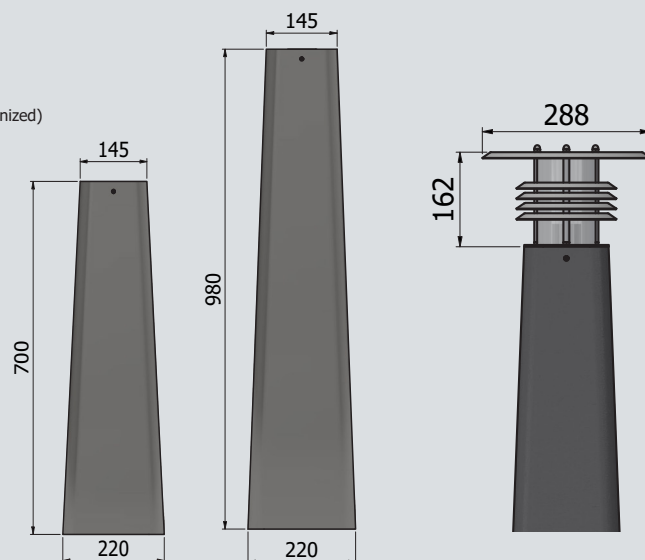

David<sup>®</sup>  
davidsuperlight.dk

