



MACON G2

Art.No.	Type
350-302-206	MACON G2 bollard fitting excl TOWER pole. E27. Satine acrylic-screen. CL.I. Hot galvanized steel.
350-302-C06	MACON G2 bollard fitting excl TOWER pole. E27. Satine acrylic-screen. CL.I. Cor-ten.
350-302-x06*	MACON G2 bollard fitting excl TOWER pole. E27. Satine acrylic-screen. CL.I. Powder coated.* Additional charge for protection class II double insulated. Prepared for fuse inset.

Accessories:

890-701-200	TOWER pole 0,70M w/mounting hatch. 145/200mm. CL.II. Hot galvanized steel.
890-701-C00	TOWER pole 0,70M w/mounting hatch. 145/200mm. CL.II. Cor-ten.
890-701-x00*	TOWER pole 0,70M w/mounting hatch. 145/200mm. CL.II. Powder coated.*
890-981-200	TOWER pole 0,98M w/mounting hatch. 145/200mm. CL.II. Hot galvanized steel.
890-981-C00	TOWER pole 0,98M w/mounting hatch. 145/200mm. CL.II. Cor-ten.
890-981-x00*	TOWER pole 0,98M w/mounting hatch. 145/200mm. CL.II. Powder coated.*
920-650-200	TOWER foundation f/burial. 190x190x500mm. Hot galvanized.
920-634-200	Turn securing for Ø108/Ø133mm pole. Hot galvanized plate.
924-100-012	Fuse inset for Ø108/Ø133mm poles. 1 neozed fuse.
920-67-350-18	Cover screen 180°. Hot galvanized plate. (Also available in 120°)


Recommended Light Sources:

982-70-11-03	Philips CorePRO LEDbulb ND 10,5-75W. E27. A60. 15000h. 1055Lm. 3000K.
982-70-11-04	Philips CorePRO LEDbulb ND 10-75W. E27. A60. 15000h. 1055Lm. 4000K.

* Powder coated: Standard colors are Anthracite RAL7016, Black RAL9005. Other RAL colors on request with extra price. Find the final Art.No. by replacing "x" with the color code. Anthracite: x=5, Black: x=9, Special: x=P.

Key features:

- 10 year anti-corrosion warranty. (Hot galvanized)
- 10 year reorder warranty.
- Easy light source change and great flexibility with retrofit LED.

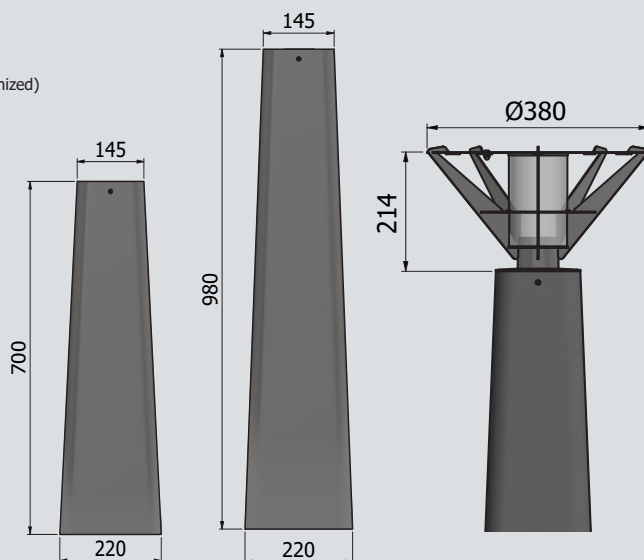

David®

daidsuperlight.dk 

