

FlipperLED

Art.No.	Type
481-222-245-K2	FlipperLED G1 park fitting excl pole. DLM ES 18W/840/2050Lm. Clear PC. CL.II. Hot galvanized steel.
481-234-245-K2	FlipperLED G1 park fitting excl pole. DLM ES 27W/840/3150Lm. Clear PC. CL.II. Hot galvanized steel.
481-238-245-K2	FlipperLED G2 park fitting excl pole. SLM 24W/840/3500Lm. Clear PC. CL.II. Hot galvanized steel.
+ PROG01	Dimmer profil = ON/OFF without dimming
+ PROG07	Dimmer profil 07 = -40% 20:00-22:00, -60% 22:00-05:00, -40% 05:00-06:00. (stepdimmer)
	Other dimming profiles on request. Note! Only SLM has the possibility of dimming.

Accessories:

802-10-030-2	Ø60/108mm stepped pole LPH 3,00M f/burial. 3,60/3,00M. Hot galvanized steel.
800-145-500	Insulation sleeve (foam block) Ø135/60 for poles Ø133/Ø108mm.
920-634-200	Turn securing for Ø108/Ø133mm pole. Hot galvanized plate.
924-100-012	Fuse inset for Ø108/Ø133mm poles. 1 neozed fuse.
800-13-108-2	Bracket f/OPUS74 outlet (excl). Fits t/Ø108mm pole. Hot galvanized steel.
920-67-481-18	Cover screen 180°. Hot galvanized plate. (Also available in 120°)
000-299-900	Surge protector >10 kV. Only relevant to FlipperLED G1.
	----- Several variations of poles, accessories and spare parts. See page 103-125 -----


	FlipperLED Model 1 (G1)	FlipperLED Model 2 (G2)
Driver	230V LED module. No driver.	Philips Xitanium series
Operating hours driver	No driver	min. 100.000 hrs
LED module	Philips LED DLM EaseSelect	Philips LED SLM
Operating hours LED	min. 50.000 hrs	min. 50.000 hrs
Surge protection	No	>10 kV
Dimming	No	Yes. Multiple options.

Variation options:

- Also available with 3000K.
- Also available for Ø133mm cylindrical pole.
- Can also be delivered with wall arm.
- Possibility of project-oriented configuration.

Key features:

- 10 year anti-corrosion warranty. (Hot galvanized)
- 10 year reorder warranty.
- 5 year LED & driver warranty.
- Supplied with 3,5M cable.

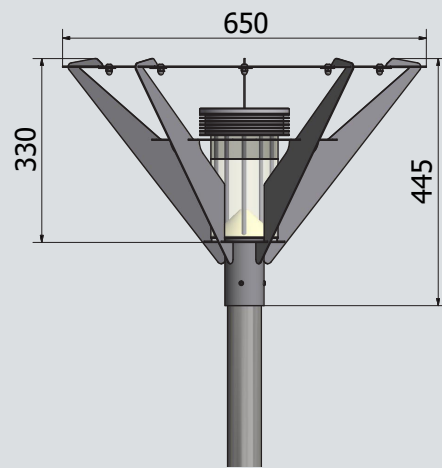

David®

davidsuperlight.dk

