



KLAUS

Art.No.	Type
200-100-205	KLAUS bollard fitting excl pole. E27. Clear PC-screen. CL.I. Hot galvanized steel.
200-100-x05*	KLAUS bollard fitting excl pole. E27. Clear PC-screen. CL.I. Powder coated.* Additional charge for protection class II double insulated.
Accessories:	
880-120-200	Ø133mm pole f/burial. 1,20/0,70M. CL.I. Hot galvanized steel.
880-120-x00*	Ø133mm pole f/burial. 1,20/0,70M. CL.I. Powder coated.* Additional charge for pole for class II bollard fittings. Delivered with mounting hatch. See page 106.
800-145-500	Insulation sleeve (foam block) Ø135/60 for poles Ø133/Ø108mm.
920-634-200	Turn securing for Ø108/Ø133mm pole. Hot galvanized plate.
800-13-133-2	Bracket f/OPUS74 outlet (excl). Fits t/Ø133mm pole. Hot galvanized steel.
800-13-133-x*	Bracket f/OPUS74 outlet (excl). Fits t/Ø133mm pole. Powder coated.*
920-67-220-18	Cover screen 180°. Hot galvanized plate. (Also available in 120°) ----- Several variations of poles, accessories and spare parts. See page 103-125 -----
Recommended Light Sources:	
982-70-09-03	Philips CorePRO LEDbulb ND 7,5-60W. E27. A60. 15000h. 806Lm. 3000K.
982-70-09-04	Philips CorePRO LEDbulb ND 7,5-60W. E27. A60. 15000h. 806Lm. 4000K.


* Powder coated: Standard colors are Anthracite RAL7016, Black RAL9005. Other RAL colors on request with extra price. Find the final Art.No. by replacing "x" with the color code. Anthracite: x=5, Black: x=9, Special: x=P.

Variation options:

- Also available with opal white PC-screen.
- Also available with clear or opal sintered glass.

Key features:

- 10 year anti-corrosion warranty. (Hot galvanized)
- 10 year reorder warranty.
- Easy light source change and great flexibility with retrofit LED.

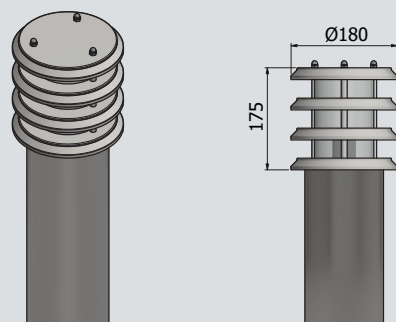

David®

daidsuperlight.dk

