



QuarkLED

| Art.No. | Type |
|-------------------------|--|
| 551-71AS-235-K2 | QuarkLED AS bollard fitting excl pole. SLM 10W/830/1800Lm. Clear PC-Screen. CL.II. Hot galvanized steel. |
| 551-71AS-245-K2 | QuarkLED AS bollard fitting excl pole. SLM 10W/840/1899Lm. Clear PC-Screen. CL.II. Hot galvanized steel. |
| 551-71AS-x35-K2* | QuarkLED AS bollard fitting excl pole. SLM 10W/830/1800Lm. Clear PC-Screen. CL.II. Powder coated.* |
| 551-71AS-x45-K2* | QuarkLED AS bollard fitting excl pole. SLM 10W/840/1899Lm. Clear PC-Screen. CL.II. Powder coated.* |
| 551-71RS-235-K2 | QuarkLED RS bollard fitting excl pole. SLM 10W/830/1800Lm. Clear PC-Screen. CL.II. Hot galvanized steel. |
| 551-71RS-245-K2 | QuarkLED RS bollard fitting excl pole. SLM 10W/840/1899Lm. Clear PC-Screen. CL.II. Hot galvanized steel. |
| 551-71RS-x35-K2* | QuarkLED RS bollard fitting excl pole. SLM 10W/830/1800Lm. Clear PC-Screen. CL.II. Powder coated.* |
| 551-71RS-x45-K2* | QuarkLED RS bollard fitting excl pole. SLM 10W/840/1899Lm. Clear PC-Screen. CL.II. Powder coated.* |


Accessories:

| | |
|-----------------------|--|
| 880-120-200 | Ø133mm pole f/burial. 1,20/0,70M. CL.I. Hot galvanized steel. |
| 880-120-x00* | Ø133mm pole f/burial. 1,20/0,70M. CL.I. Powder coated.* |
| | Additional charge for pole for class II bollard fittings. Delivered with mounting hatch. See page 106. |
| 800-145-500 | Insulation sleeve (foam block) Ø135/60 for poles Ø133/Ø108mm. |
| 920-634-200 | Turn securing for Ø108/Ø133mm pole. Hot galvanized plate. |
| 800-13-133-2 | Bracket f/OPUS74 outlet (excl). Fits t/Ø133mm pole. Hot galvanized steel. |
| 800-13-133-x* | Bracket f/OPUS74 outlet (excl). Fits t/Ø133mm pole. Powder coated.* |
| 920-67-5511-18 | Cover screen 180°. Hot galvanized plate. (Also available in 120°) |
| | ----- Several variations of poles, accessories and spare parts. See page 103-125 ----- |

* Powder coated: Standard colors are Anthracite RAL7016, Black RAL9005. Other RAL colors on request with extra price. Find the final Art.No. by replacing "x" with the color code. Anthracite: x=5, Black: x=9, Special: x=P.

Key features:

- 10 year anti-corrosion warranty. (Hot galvanized)
- 10 year reorder warranty.
- 5 year LED warranty.
- 230V LED module. No driver.
- Life expectancy: 50.000 hours.
- Integrated >10 kV surge protection.

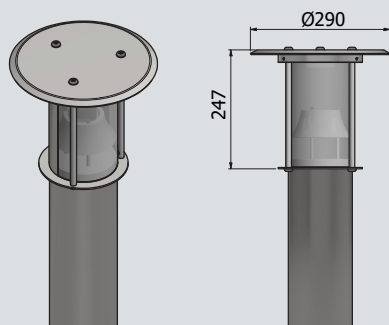

David®

daidsuperlight.dk 

