


Art.Nr.	Type
340-112-235	CARLO bollard fitting. Fortimo DLM ES 10W/830/1100. CL.I. Hot galvanized steel.
340-112-245	CARLO bollard fitting. Fortimo DLM ES 10W/840/1100. CL.I. Hot galvanized steel.
340-112-235-K2	CARLO bollard fitting. Fortimo DLM ES 10W/830/1100. CL.II. Hot galvanized steel.
340-112-535	CARLO bollard fitting. Fortimo DLM ES 10W/830/1100. CL.I. Anthracite RAL7016.
340-112-545	CARLO bollard fitting. Fortimo DLM ES 10W/840/1100. CL.I. Anthracite RAL7016.
340-112-935	CARLO bollard fitting. Fortimo DLM ES 10W/830/1100. CL.I. Black RAL9005.
340-112-945	CARLO bollard fitting. Fortimo DLM ES 10W/840/1100. CL.I. Black RAL9005.
340-118-235	CARLO bollard fitting. Fortimo DLM ES 18W/830/2000. CL.I. Hot galvanized steel.
340-118-245	CARLO bollard fitting. Fortimo DLM ES 18W/840/2000. CL.I. Hot galvanized steel.
340-118-535	CARLO bollard fitting. Fortimo DLM ES 18W/830/2000. CL.I. Anthracite RAL7016.
340-118-545	CARLO bollard fitting. Fortimo DLM ES 18W/840/2000. CL.I. Anthracite RAL7016.
340-118-935	CARLO bollard fitting. Fortimo DLM ES 18W/830/2000. CL.I. Black RAL9005.
340-118-945	CARLO bollard fitting. Fortimo DLM ES 18W/840/2000. CL.I. Black RAL9005.
Accessories:	
880-120-200	Ø133mm pole. 1,20/0,70M f/burial. CL.I. Hot galvanized steel.
880-121-200	Ø133mm pole. 1,20/0,70M f/burial. CL.II w/mounting hatch. Hot galvanized steel.
880-120-500	Ø133mm pole. 1,20/0,70M f/burial. CL.I. Anthracite RAL7016.
880-121-500	Ø133mm pole. 1,20/0,70M f/burial. CL.II w/mounting hatch. Anthracite RAL7016.
881-080-200	Ø133mm pole. 0,80M f/mounting. CL.I. Hot galvanized steel.
881-081-200	Ø133mm pole. 0,80M f/mounting. CL.II. w/mounting hatch. Hot galvanized steel.
881-080-500	Ø133mm pole. 0,80M f/mounting. CL.I. Anthracite RAL7016.
881-081-500	Ø133mm pole. 0,80M f/mounting. CL.II. w/mounting hatch. Anthracite RAL7016.
920-634-200	Turn securing for Ø108/Ø133mm pole. Hot galvanized plate.
800-145-500	Insulation sleeve (foam block) Ø135/60 for poles Ø133/Ø108mm.



- Key features:
- 10 year anti-corrosion warranty. (Hot galvanized)
 - 10 year reorder warranty.
 - 5 year LED warranty.
 - CL. II Supplied with 1M cable.
 - 230V LED module. No driver.
 - Life expectancy 50.000 hours.

solar | light

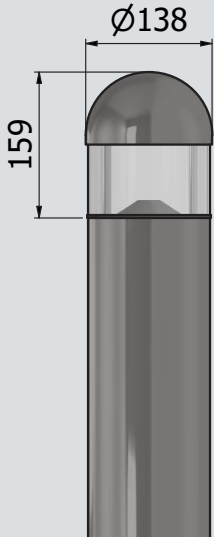