

Vertical Balers

B-series



Baler B50 SD

For optimal transport logistics

The B50 SD baler offers efficient compaction into dense bales with ideal dimensions for optimal transport logistics.

Perfect pallet size bales

Bales measure 1200 mm x 800 mm x 1100 mm and fit on a standard EUR pallet.

Highlights

- Machine design and demountable cylinder give a low transport height
- Uses standard 16A outlet
- Short press cycle
- Low noise level
- High compression ratio
- Produces large bales (minimum 400 kg cardboard)
- Powder Coating provides durable finish in many colors.


Optional Extras



Restrict the access to your baler with a digital auto lock. Use a key tag or personal code.



With our monitoring system BRA-IN you can control and optimize your baler fleet.

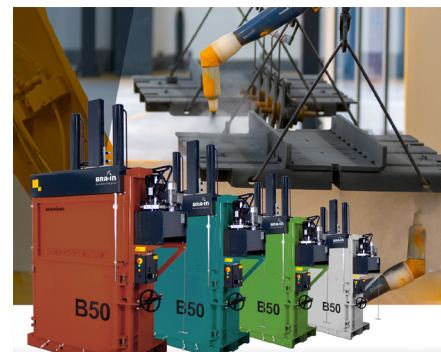

Order balers in a custom colour. Certain parts like top cover remain our standard grey.

Product details

Baler B50 SD



Whisper

30 dB



Refrigerator

50 dB




B50 SD

62-64 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

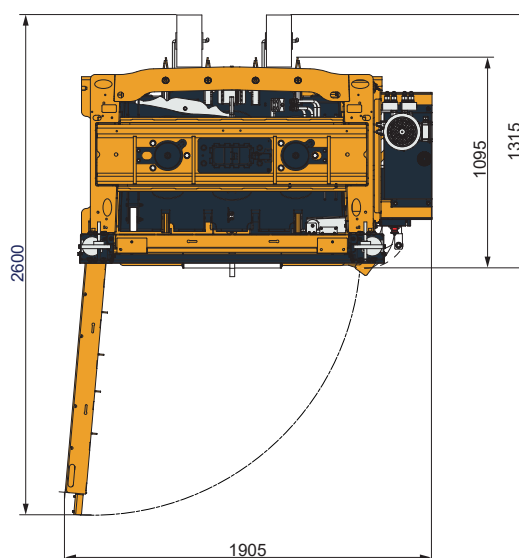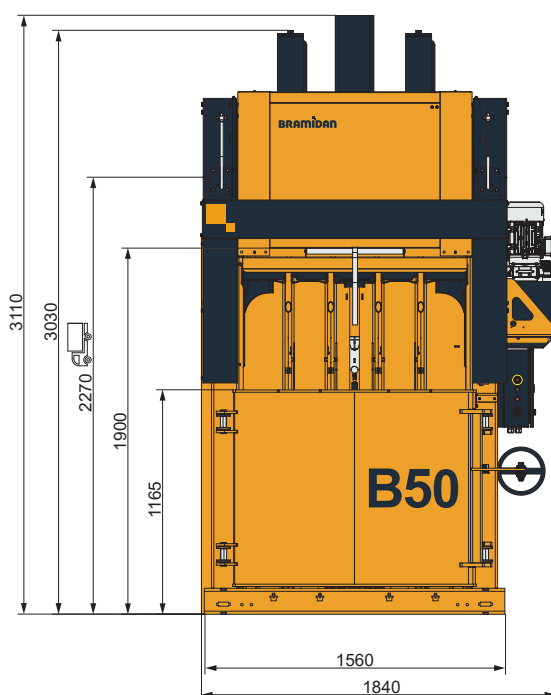

Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 1100
Feed opening WxH (mm)	1200 x 565
Power supply	3x400V 50Hz 16A
Motor (kW)	4.0
Cycle time avg. (sec)	55 / 26
Dimensions WxDxH (mm)	1840 x 1315 x 3110
Weight (kg)	1755
Stroke (mm)	900
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



Bale weight

Cardboard (kg)	400-500
Plastic foil (kg)	450-550



Press force	50 t
-------------	------



Noise level	62-64 dB
-------------	----------



Waste types

Cardboard, plastic foil, paper.

BRAMIDAN
bramidan.com

Bramidan A/S
Industrivej 69
6740 Bramming
Denmark
Tel. +45 7517 3266
bramidan@bramidan.dk