

## Vertical Balers

### B-series



## Baler B50 SD

### For optimal transport logistics

The B50 SD baler offers efficient compaction into dense bales with ideal dimensions for optimal transport logistics.


### Perfect pallet size bales

Bales measure 1200 mm x 800 mm x 1100 mm and fit on a standard EUR pallet.

### Highlights

- Machine design and demountable cylinder give a low transport height
- Uses standard 16A outlet
- Short press cycle
- Low noise level
- High compression ratio
- Produces large bales (minimum 400 kg cardboard)
- Powder Coating provides durable finish in many colors.

## Optional Extras

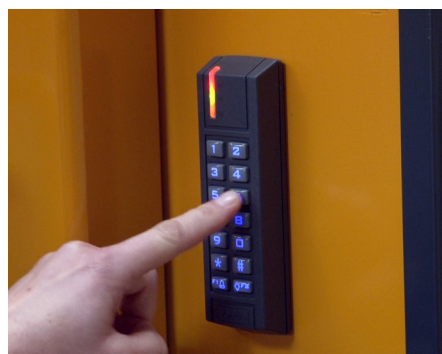

Restrict the access to your baler with a digital auto lock. Use a key tag or personal code.



With our monitoring system BRA-IN you can control and optimize your baler fleet.



Order balers in a custom colour. Certain parts like top cover remain our standard grey.

# Product details

## Baler B50 SD



Whisper

30 dB



Refrigerator

50 dB




B50 SD

62-64 dB



Other balers

75 dB





Cars on highway

100 dB



Turbojet engine

160 dB

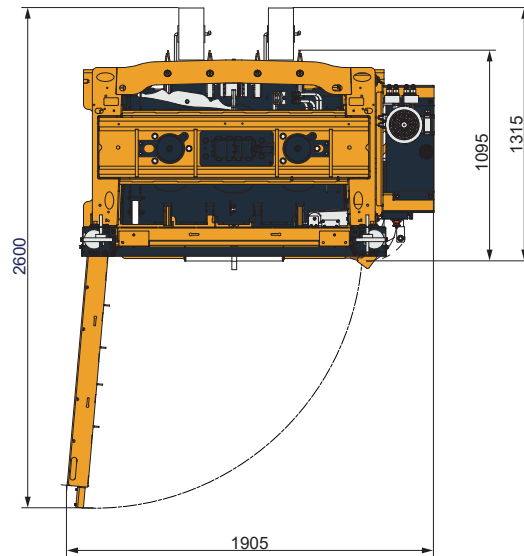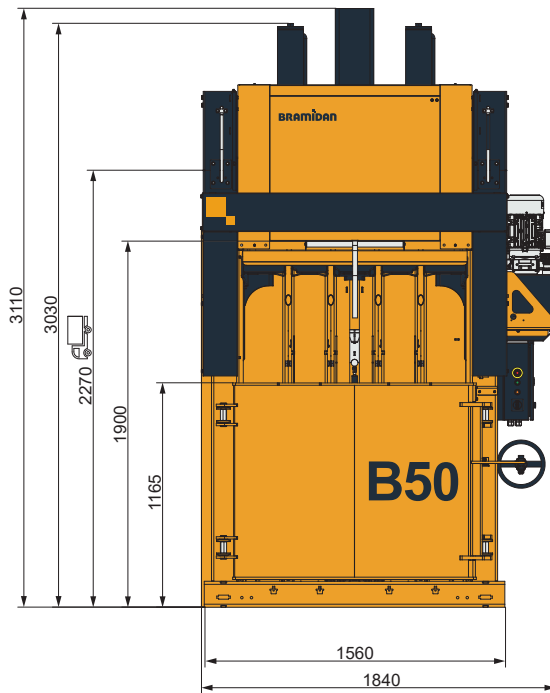

### Technical specifications

Bale size WxDxH (mm)	1200 x 800 x 1100
Feed opening WxH (mm)	1200 x 565
Power supply	3x400V 50Hz 16A
Motor (kW)	4.0
Screen 40 mm (m3/h)	55 / 26
Dimensions WxDxH (mm)	1840 x 1315 x 3110
Weight (kg)	1755
Stroke (mm)	900
Number of ties	4
Type of tying	Twine / Steel wire
Full bale light	Yes
Bale eject	Automatic



### Bale weight

Cardboard (kg)	400-500
Plastic foil (kg)	450-550



Press force 50 t



Noise level 62-64 dB



### Waste types

Cardboard, plastic foil, paper.

**BRAMIDAN**  
bramidan.ie

Acme Systems Ltd. – Part of Bramidan Group  
Unit 4 - Feltrim Business Park  
Swords, co Dublin  
Tel. 1 890 0660  
sales@acmesystems.ie / sales@bramidan.ie